ATB-AGM-DC6-250

Deep-cycle AGM.
Built for repeated cycling.

A 6 V 250 Ah deep-cycle AGM VRLA battery engineered for repeated discharge to 50% DoD or deeper. A rugged thick-plate grid design and high active-material density give high cycle life in motive power, solar and renewable-energy storage and marine use. Sealed, maintenance-free and non-spillable, with M8 bolt terminals.



6 V	250 Ah	1500 A	34.5 kg
NOMINAL VOLTAGE	C20 CAPACITY @ 25°C	MAX DISCHARGE (5 S)	APPROX. WEIGHT

Sealed AGM VRLA
Valve-regulated oxygen-recombination design. Maintenance-free and non-spillable: no electrolyte topping and no acid handling.

M8 bolt terminals
Threaded M8 terminals for secure bolted cable connections in UPS, telecom and storage systems.

Deep-cycle design
Thick plates and high active-material density for repeated deep discharge.

Standard footprint
260 × 180 × 275.5 mm case.

SPECIFICATIONS


MECHANICAL

Length	**260 mm ±2.5**
Width	**180 mm ±2.0**
Container height	**269 mm ±2.5**
Overall height	**275.5 mm ±2.5**
Approx. weight	**34.5 kg ±3%**
Container material	**ABS, UL94-HB (UL94-V0 optional)**
Terminal type	**M8 bolt terminal**

ELECTRICAL

Nominal voltage	**6 V**
Chemistry	**AGM VRLA (sealed)**
Capacity, 20 hr (C20)	**250 Ah**
Capacity, 10 hr (C10)	**233 Ah**
Capacity, 5 hr (C5)	**212.5 Ah**
Rating basis	**to 1.75 V/cell @ 25°C**
Float voltage @ 25°C	**6.75 – 6.90 V**
Equalizing voltage @ 25°C	**7.20 – 7.50 V**
Max charge current	**75 A**
Max discharge current	**1500 A (5 s)**
Internal resistance (charged)	**≈ 1.8 mΩ**
Operating temp. (dis / chg)	**−15°C~50°C / −15°C~40°C**
Storage temp.	**−15°C~40°C**

CONTAINER DRAWING — DIMENSIONS IN MM

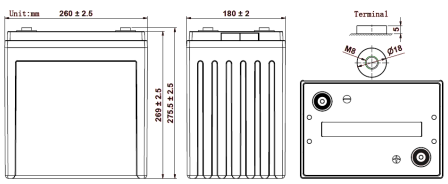

ATB-AGM-DC6-250 — technical data

CONSTANT CURRENT DISCHARGE @ 25°C · UNIT: A

F.V (V/cell) / Time	30 min	45 min	1 h	3 h	5 h	8 h	10 h	20 h
1.60 V	245	183	153	65.7	44.3	29.6	24.1	12.9
1.67 V	238	178	149	64.6	43.6	29.1	23.8	12.7
1.70 V	235	176	148	63.9	43.2	28.9	23.6	12.6
1.75 V	230	173	145	63.2	42.5	28.6	23.3	12.5
1.80 V	224	169	143	62.1	42.1	28.2	23.0	12.4
1.85 V	219	166	140	61.4	41.4	27.9	22.8	12.3

CONSTANT POWER DISCHARGE @ 25°C · UNIT: W/CELL

F.V (V/cell) / Time	30 min	45 min	1 h	3 h	5 h	8 h	10 h	20 h
1.60 V	464	346	292	128	86.8	58.6	47.9	25.8
1.67 V	454	339	286	126	85.4	57.5	47.1	25.4
1.70 V	446	336	284	125	84.6	57.1	46.8	25.3
1.75 V	439	332	280	124	83.9	56.4	46.1	25.0
1.80 V	432	327	276	122	82.9	56.1	45.7	24.8
1.85 V	421	322	272	120	81.8	55.4	45.4	24.5

EFFECT OF TEMPERATURE ON CAPACITY (20 HR)

Temperature	Capacity (20 HR)
40 °C	102%
25 °C	100%
0 °C	85%
−15 °C	65%


SELF-DISCHARGE CHARACTERISTICS

Storage time	Remaining capacity
3 months	91%
6 months	82%
12 months	64%

CHARACTERISTIC CURVES


Discharge Characteristics

TERMINAL VOLTAGE (V/CELL) vs DISCHARGE TIME · 25°C / 20°C




Charging Characteristics

0.1 CA · 2.25 V/CELL @ 25°C




Capacity Retention (Self-Discharge)

CAPACITY RETENTION RATIO vs STORAGE TIME

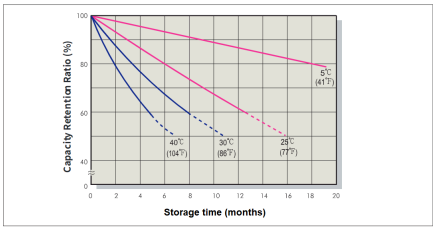

Float Service Life

FLOAT LIFE vs BATTERY TEMPERATURE · 2.25 V/CELL



STANDARDS & QUALITY

AGM VRLA batteries produced by an ATB-approved manufacturing partner whose VRLA batteries are UL-recognized components under UL 1989, in facilities certified to ISO 9001, ISO 14001 and ISO 45001. Sealed, non-spillable VRLA construction.

Values are subject to variation of ±5% under normal manufacturing processes. Technical specifications are subject to change without prior notice. Curves represent typical performance for the AGM VRLA cell platform at the stated reference conditions. This product is engineered, specified and branded by ATB Power. E&OE. © ATB Power.