ATB-AGM-FT12-125

Front-terminal AGM.
Made for telecom racks.

A 12 V 134 Ah front-terminal AGM VRLA battery for telecom and UPS racks, with high energy density and a robust grid design. Sealed, maintenance-free and non-spillable, with M8 bolt terminals.



12 V	134 Ah	1250 A	41.5 kg
NOMINAL VOLTAGE	C20 CAPACITY @ 25°C	MAX DISCHARGE (5 S)	APPROX. WEIGHT

Sealed AGM VRLA
Valve-regulated oxygen-recombination design. Maintenance-free and non-spillable: no electrolyte topping and no acid handling.

M8 bolt terminals
Threaded M8 terminals for secure bolted cable connections in UPS, telecom and storage systems.

Front-access design
Both terminals on the front face for installation and inspection in racks.

Standard footprint
551 × 110 × 288 mm case.

SPECIFICATIONS


MECHANICAL

Length	**551 mm ±2.5**
Width	**110 mm ±2.0**
Container height	**288 mm ±2.5**
Overall height	**288 mm ±2.5**
Approx. weight	**41.5 kg ±3%**
Container material	**ABS, UL94-HB (UL94-V0 optional)**
Terminal type	**M8 bolt terminal**

ELECTRICAL

Nominal voltage	**12 V**
Chemistry	**AGM VRLA (sealed)**
Capacity, 20 hr (C20)	**134 Ah**
Capacity, 10 hr (C10)	**125 Ah**
Capacity, 5 hr (C5)	**114 Ah**
Rating basis	**to 1.80 V/cell @ 25°C**
Float voltage @ 25°C	**13.5 – 13.8 V**
Equalizing voltage @ 25°C	**14.4 – 15.0 V**
Max charge current	**37.5 A**
Max discharge current	**1250 A (5 s)**
Internal resistance (charged)	**≈ 6.0 mΩ**
Operating temp. (dis / chg)	**−15°C~50°C / −15°C~40°C**
Storage temp.	**−15°C~40°C**

CONTAINER DRAWING — DIMENSIONS IN MM

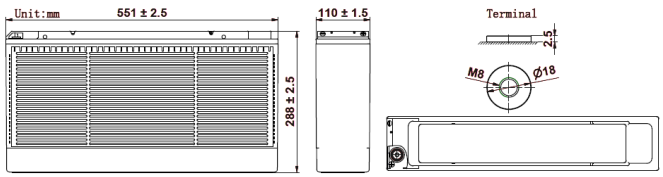

ATB-AGM-FT12-125 — technical data

CONSTANT CURRENT DISCHARGE @ 25°C · UNIT: A

F.V (V/cell) / Time	30 min	45 min	1 h	3 h	5 h	8 h	10 h	20 h
1.60 V	129	93.1	78.1	34.1	24.4	15.6	13.0	6.99
1.67 V	127	91.8	77.0	33.8	24.1	15.4	12.9	6.90
1.70 V	125	90.5	75.9	33.5	23.5	15.1	12.8	6.83
1.75 V	123	88.8	74.4	32.9	23.1	14.9	12.6	6.76
1.80 V	120	85.6	70.9	32.3	22.8	14.9	12.5	6.70
1.85 V	111	80.8	68.4	29.7	21.7	14.1	11.7	6.45

CONSTANT POWER DISCHARGE @ 25°C · UNIT: W/CELL

F.V (V/cell) / Time	30 min	45 min	1 h	3 h	5 h	8 h	10 h	20 h
1.60 V	236	173	147	65.2	47.2	30.6	25.3	13.8
1.67 V	235	172	146	65.0	46.7	30.3	25.0	13.7
1.70 V	234	171	145	64.6	45.9	29.9	24.8	13.5
1.75 V	231	168	143	63.7	45.4	29.5	24.5	13.4
1.80 V	228	164	136	62.7	44.7	29.4	24.4	13.3
1.85 V	211	155	132	58.0	42.6	28.0	23.3	12.9

EFFECT OF TEMPERATURE ON CAPACITY (10 HR)

Temperature	Capacity (10 HR)
40 °C	102%
25 °C	100%
0 °C	85%
−15 °C	65%


SELF-DISCHARGE CHARACTERISTICS

Storage time	Remaining capacity
3 months	91%
6 months	82%
12 months	64%

CHARACTERISTIC CURVES


Discharge Characteristics

TERMINAL VOLTAGE (V/CELL) vs DISCHARGE TIME · 25°C / 20°C




Charging Characteristics

0.1 CA · 2.25 V/CELL @ 25°C




Capacity Retention (Self-Discharge)

CAPACITY RETENTION RATIO vs STORAGE TIME

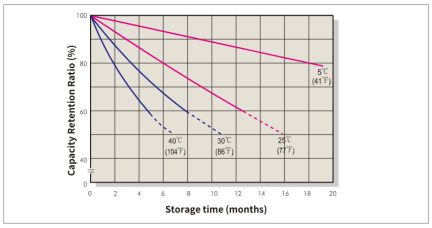

Float Service Life

FLOAT LIFE vs BATTERY TEMPERATURE · 2.25 V/CELL



STANDARDS & QUALITY

AGM VRLA batteries produced by an ATB-approved manufacturing partner whose VRLA batteries are UL-recognized components under UL 1989, in facilities certified to ISO 9001, ISO 14001 and ISO 45001. Sealed, non-spillable VRLA construction.

Values are subject to variation of ±5% under normal manufacturing processes. Technical specifications are subject to change without prior notice. Curves represent typical performance for the AGM VRLA cell platform at the stated reference conditions. This product is engineered, specified and branded by ATB Power. E&OE. © ATB Power.