ATB-AGM-FT12-175

Front-terminal AGM.
Made for telecom racks.

A 12 V 183 Ah front-terminal AGM VRLA battery for telecom and UPS racks, with high energy density and a robust grid design. Sealed, maintenance-free and non-spillable, with M8 bolt terminals.



12 V	183 Ah	1360 A	53.5 kg
NOMINAL VOLTAGE	C20 CAPACITY @ 25°C	MAX DISCHARGE (5 S)	APPROX. WEIGHT

Sealed AGM VRLA
Valve-regulated oxygen-recombination design. Maintenance-free and non-spillable: no electrolyte topping and no acid handling.

M8 bolt terminals
Threaded M8 terminals for secure bolted cable connections in UPS, telecom and storage systems.

Front-access design
Both terminals on the front face for installation and inspection in racks.

Standard footprint
561 × 125 × 316 mm case.

SPECIFICATIONS


MECHANICAL

Length	**561 mm ±2.5**
Width	**125 mm ±2.0**
Container height	**316 mm ±2.5**
Overall height	**316 mm ±2.5**
Approx. weight	**53.5 kg ±3%**
Container material	**ABS, UL94-HB (UL94-V0 optional)**
Terminal type	**M8 bolt terminal**

ELECTRICAL

Nominal voltage	**12 V**
Chemistry	**AGM VRLA (sealed)**
Capacity, 20 hr (C20)	**183 Ah**
Capacity, 10 hr (C10)	**170 Ah**
Capacity, 5 hr (C5)	**155.5 Ah**
Rating basis	**to 1.80 V/cell @ 25°C**
Float voltage @ 25°C	**13.5 – 13.8 V**
Equalizing voltage @ 25°C	**14.4 – 15.0 V**
Max charge current	**51 A**
Max discharge current	**1360 A (5 s)**
Internal resistance (charged)	**≈ 4.0 mΩ**
Operating temp. (dis / chg)	**−15°C~50°C / −15°C~40°C**
Storage temp.	**−15°C~40°C**

CONTAINER DRAWING — DIMENSIONS IN MM

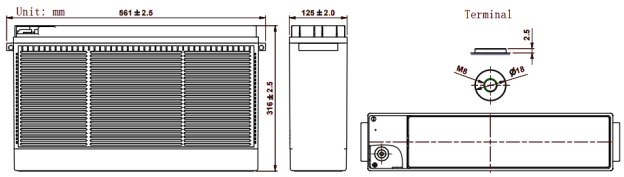

ATB-AGM-FT12-175 — technical data

CONSTANT CURRENT DISCHARGE @ 25°C · UNIT: A

F.V (V/cell) / Time	30 min	45 min	1 h	3 h	5 h	8 h	10 h	20 h
1.60 V	175	127	106	46.3	33.4	21.3	17.7	9.57
1.67 V	173	125	105	46.0	32.9	20.9	17.5	9.45
1.70 V	170	123	103	45.5	32.2	20.6	17.3	9.34
1.75 V	167	121	101	44.7	31.7	20.2	17.2	9.25
1.80 V	164	116	96.4	43.9	31.1	20.2	17.0	9.16
1.85 V	150	110	93.0	40.4	29.7	19.2	15.9	8.82

CONSTANT POWER DISCHARGE @ 25°C · UNIT: W/CELL

F.V (V/cell) / Time	30 min	45 min	1 h	3 h	5 h	8 h	10 h	20 h
1.60 V	321	235	200	88.7	64.6	41.7	34.3	18.9
1.67 V	320	234	198	88.4	63.9	41.1	34.0	18.7
1.70 V	318	232	197	87.9	62.8	40.6	33.7	18.5
1.75 V	314	229	194	86.6	62.1	40.1	33.3	18.3
1.80 V	310	222	185	85.3	61.2	40.0	33.2	18.1
1.85 V	287	211	180	78.8	58.4	38.1	31.6	17.6

EFFECT OF TEMPERATURE ON CAPACITY (10 HR)

Temperature	Capacity (10 HR)
40 °C	102%
25 °C	100%
0 °C	85%
−15 °C	65%


SELF-DISCHARGE CHARACTERISTICS

Storage time	Remaining capacity
3 months	91%
6 months	82%
12 months	64%

CHARACTERISTIC CURVES


Discharge Characteristics

TERMINAL VOLTAGE (V/CELL) vs DISCHARGE TIME · 25°C / 20°C




Charging Characteristics

0.1 CA · 2.25 V/CELL @ 25°C




Capacity Retention (Self-Discharge)

CAPACITY RETENTION RATIO vs STORAGE TIME

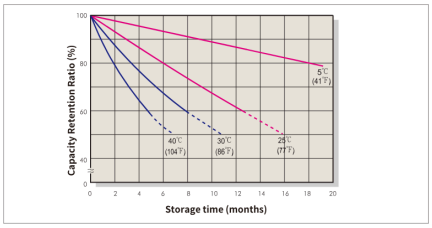

Float Service Life

FLOAT LIFE vs BATTERY TEMPERATURE · 2.25 V/CELL



STANDARDS & QUALITY

AGM VRLA batteries produced by an ATB-approved manufacturing partner whose VRLA batteries are UL-recognized components under UL 1989, in facilities certified to ISO 9001, ISO 14001 and ISO 45001. Sealed, non-spillable VRLA construction.

Values are subject to variation of ±5% under normal manufacturing processes. Technical specifications are subject to change without prior notice. Curves represent typical performance for the AGM VRLA cell platform at the stated reference conditions. This product is engineered, specified and branded by ATB Power. E&OE. © ATB Power.